EN

Tillers

SA
















The SA model is the lightest rotary tiller in the Sicma range and, thanks to its low power absorption, it can be used with tractors from 10 to 30 HP. It is highly

appreciated for its manual side shift; easy to handle and transport, it is ideal for light-duty applications.

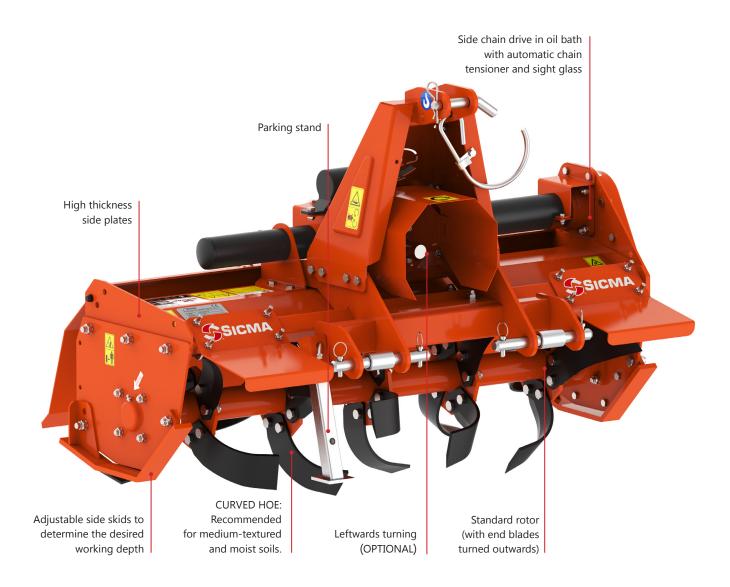





Flexible clutch

n case of sudden absorption of power there are two discs that slide, thereby redistributing the forces.




Shear bolt

They adjust the working depth of the rotary tiller.

TECHNICAL DATA

Reducer speed:



Models and Features:

	⊕ ⊕ HP	mm (in)	mm (in)	mm (in)	∆ kg (lbs)	nr.	cat.
SA 85	10 ▶ 30	850 (33")	920 (36")	240 (10")	128 (282)	16	1
SA 105	10 ▶ 30	1050 (41")	1120 (44")	340 (13")	141 (310)	20	1
SA 125	10 ▶ 30	1250 (49")	1320 (52")	440 (17")	150 (330)	24	1

SICMA S.p.a. reserves the right to carry out technical and structural modifications without prior notice.

The experience that cultivates the future of your land

SICMA S.p.a. is an Italian company and a leader in the professional agricultural machinery sector. We design and create cutting-edge solutions for you, the farmer of tomorrow. Innovation and passion at your service.





Sicma SpA

Contrada Cerreto, 39 66010 Miglianico (CH) Tel. +39 0871 95841

info@sicma.it - www.sicma.it







