


AC TRACTORS

TIGRE 4800 F steering tractor with different-sized wheels designed for specialized agriculture, grounds care, construction and earthmoving applications. The new styling, in keeping with the **family-feeling** of high range **AC** tractors, is not only aesthetically pleasing, it also helps optimize operating efficiency. The dynamic, streamlined profile of the bonnet, combined with the stylized design of the mudguards, complete with integral lights and extensions, makes for excellent allround visibility.

ANTONIOCARRARO.COM









TECHNICAL DATA: TIGRE 4800 F

Frame	ACTIO™ integral oscillating frame • Steering wheels • Different-size wheels and four-wheel
	drive • Rear final drives

Direct injection diesel Emissions Standard: **Stage 5** No. of cylinders: 3

Engine type

Rated rpm: 2800


Tank capacity (litres): 30

With front tyres: 7.50-16

Power kW/CV (97/68/CE): 28,5/38,7

Max torque (Nm/rpm): 126/1690

Transmission	Easy-shift mechanical gearbox with 12 speeds (8 FWD + 4 REV)
Power take-off	Standard at 540 rpm and synchronised with all gearbox speeds
Shaft	ASAE 6 spline 1 3/8" shaft with easy coupling
Hydraulic lift	Rear with 3-point linkage - Cat. 1 and 1N - Adjustable top link and lift rods - Capacity (kg): 1000
Steering	Hydraulic with load sensing system
Brakes	Service brake and parking brake; Steering brakes
Platform	Suspended on vibration dampers
Weight	With roll bar: 1250 kg

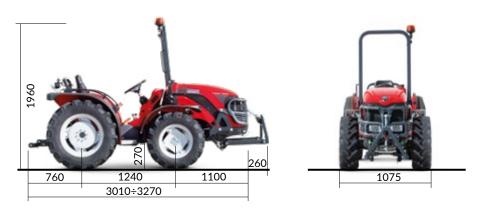

rear: 9.5 R20

Dimensions